

Sure to please any aficionado of fine English rifles, the Ambassador flaunts sleek, almost feminine lines, whilst retaining the technical 'know how' that sets Schultz & Larsen rifles apart from the crowd when accuracy is mentioned. The slim English style stock retains the Classic straight top line but still incorporates a comfortable and elegant cheek piece. The grip has an open radius that may not be to everyone's taste but will be instantly familiar to connoisseurs of fine English rifles. With standard profile barrel, the Ambassador weighs 3.6kg. Fluted barrels reduce this to between 3.4 kg and 3.5kg. Magnum calibres come in at 3.7 kg.



As standard, the Ambassador is equipped with the excellent Schultz & Larsen single stage trigger, adjustable for weight and length. The Schultz & Larsen designed and made double stage Match trigger is available as an option. On this trigger the first stage of the pull takes 60% of the total pull weight, leaving a final light and crisp second stage.

The top surface of the Ambassador action, unlike the Classic or Victory, is not milled to directly accept the Schultz & Larsen made 'Slide & Lock' mounts.



Instead separate bases are available that attach by means of the drilled and tapped holes provided for this purpose. As an alternative option, a Schultz & Larsen made Picatinny rail is available, in either 0, 10 or 20 MOA, that is attached using the same drilled and tapped holes. This rail allows the use of a wide range of both Weaver and Picatinny mounts and also facilitates the use of night vision scopes. Separate Weaver bases are also available to complete the mounting options.

The Ambassador has a switch barrel system allowing the barrel to be changed for any other in its calibre group with just a simple wrench. The standard bolt can be used with all calibres in the standard calibre group but if changing to a Magnum calibre you will need to change the bolt.



Safety has top priority with all locking parts designed and tested to withstand at least three times normal load. In the case of an overload resulting in a primer blow-out or case rupture, the high pressure gas can escape through holes in the front of the action and on the side of the bolt. This, coupled with the extremely tight fit of the bolt and action, ensures that the shooter is not injured.

The safety catch is three position and locks the bolt and blocks the firing pin. The centre position allows unloading of the rifle whilst the safety is engaged.

Available Calibres

Standard

Calibre	Twist Rate	Calibre	Twist Rate
.22-250	1 : 10	6mm XC	1 : 8
.243 Win	1 : 10	.25-06	1 : 10
6.5x47 Lapua	1 : 210mm	6.5x55 SE	1 : 210mm
6.5-284	1 : 210mm	.270 Win	1 : 10
7x57	1 : 10	7x64	1 : 10
7mm-08	1 : 10	.308 Win	1 : 10
.30-06 Sprg	1 : 10	.338-06	1 : 10
8 x 57 JS	1 : 10	9.3x62	1 : 14

Magnum

7mm Rem Mag	1 : 10	.300 Win Mag	1 : 10
.300 WSM	1 : 10	.270 WSM	1 : 10
.338 Win Mag	1 : 10	.358 Norma Mag	1 : 12


Safari

.375 Ruger	1 : 12	.416 Taylor	1 : 14
.458 Norma Mag	1 : 14		



Stock Options

The Ambassador stock follows the traditional lines of bygone days with an open radius grip and a slim tapered forearm capped with rosewood. Available in six wood grades, all with a linseed oil finish to enhance the figure and beauty of the wood.

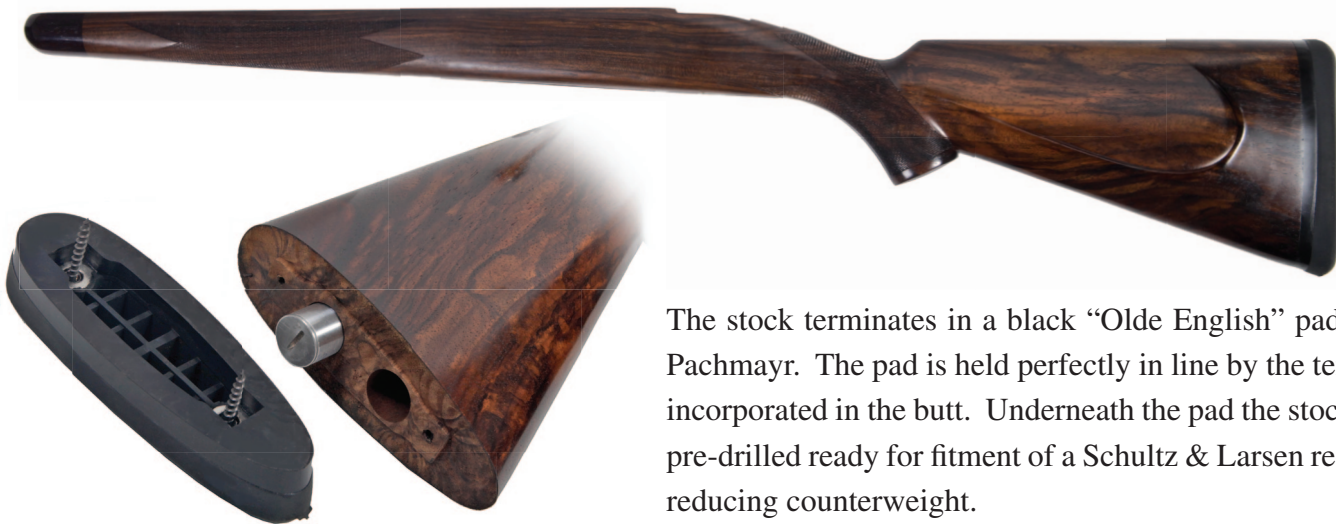

The stock terminates in a black “Olde English” pad by Pachmayr. The pad is held perfectly in line by the tenon incorporated in the butt. Underneath the pad the stock is pre-drilled ready for fitment of a Schultz & Larsen recoil reducing counterweight.

Scope Mounts (See Scope Mounts Data Sheet for more information)

Schultz & Larsen
“Slide & Lock” Rings
Various Sizes Available



Schultz & Larsen
Picatinny Rings
Model 50 (Height of 4mm)
Model 56 (Height of 7mm)



Schultz & Larsen
Picatinny Rail
Available in 0, 10 or 20 MOA
Height (BH) 7mm
Length 165mm
Weight 45g

